
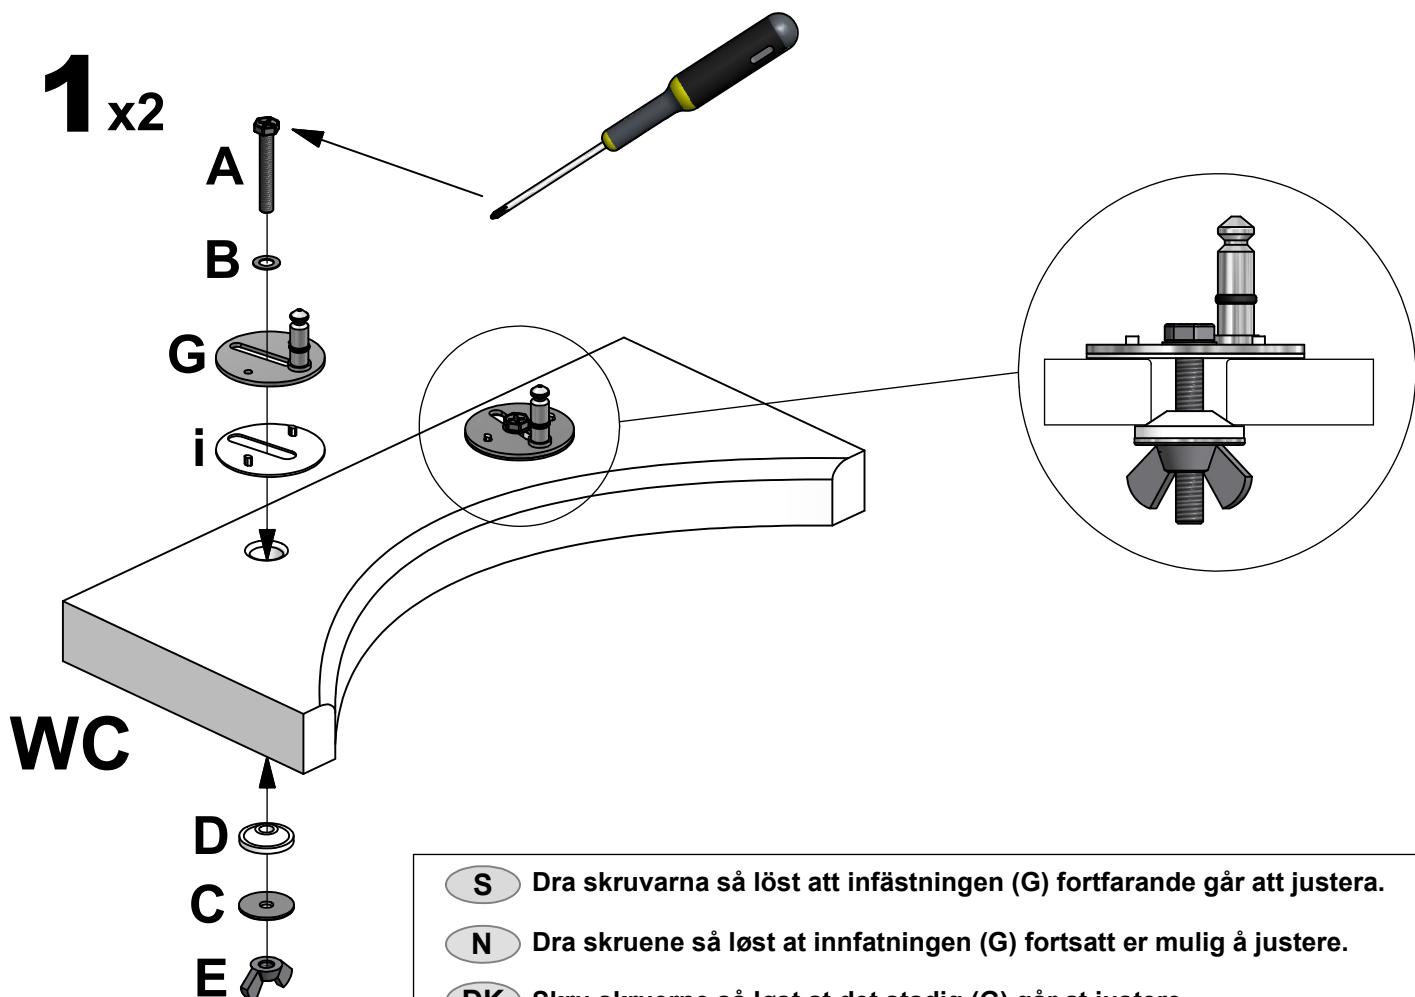


90639

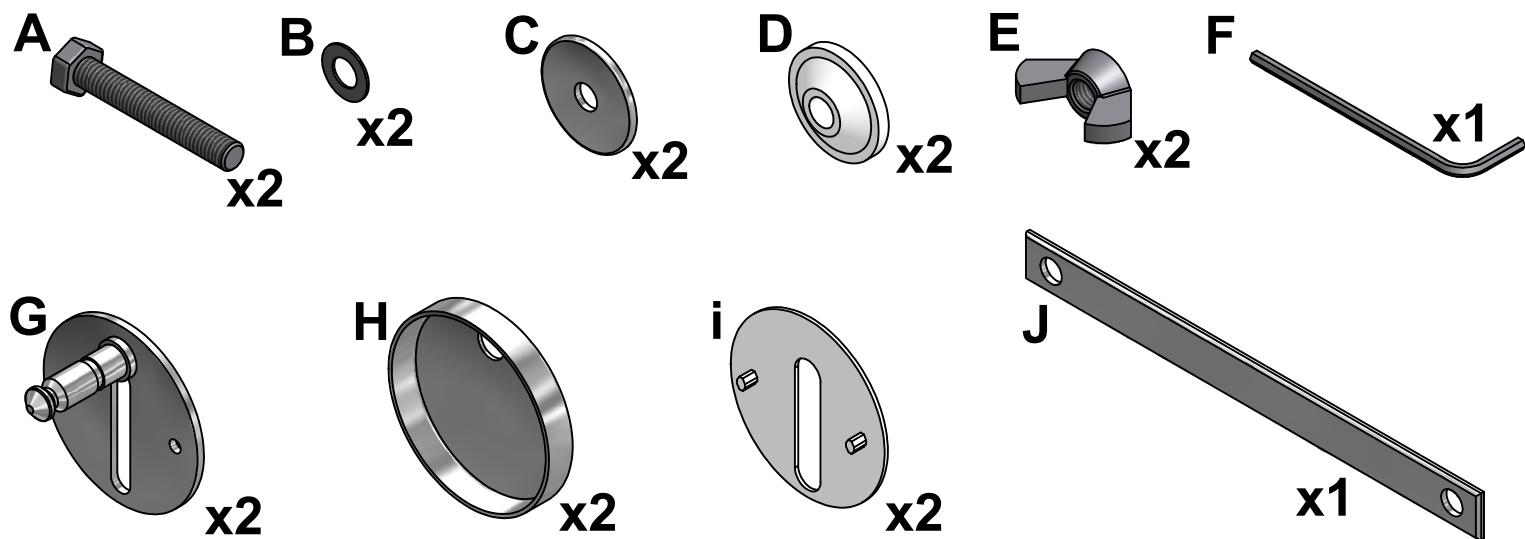

S Dra skruvorna så löst att infästningen (G) fortfarande går att justera.

N Dra skruene så løst at innfatningen (G) fortsatt er mulig å justere.

DK Skru skruerne så löst at det stadig (G) går at justere.


FI Kiristä ruuveja vain sen verran, että kiinnitystä vielä pystyy säätämään.

GB Loosely tighten the screws to allow adjustments of the fittings (G).


RU Затягивайте шурупы в такой степени, чтобы их можно было все-таки регулировать.

2 x2


I

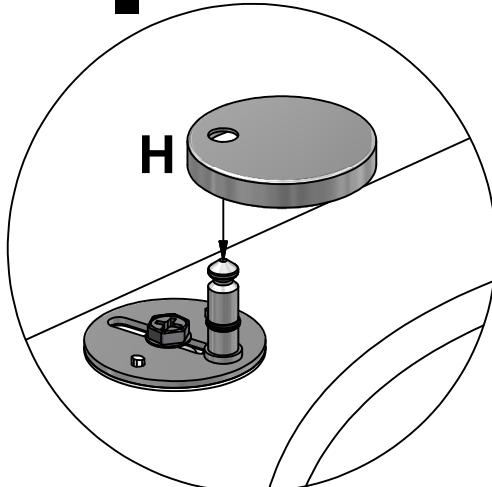


II

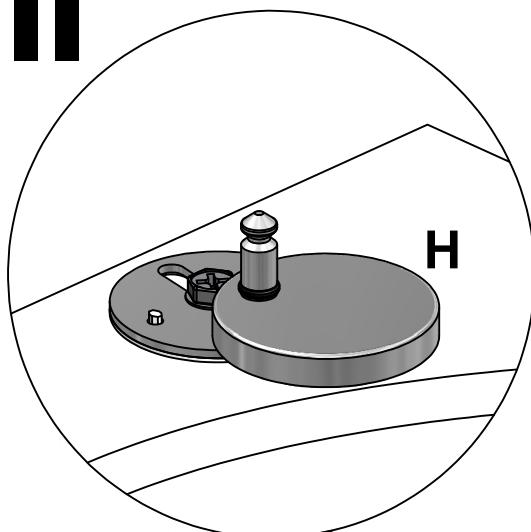


3

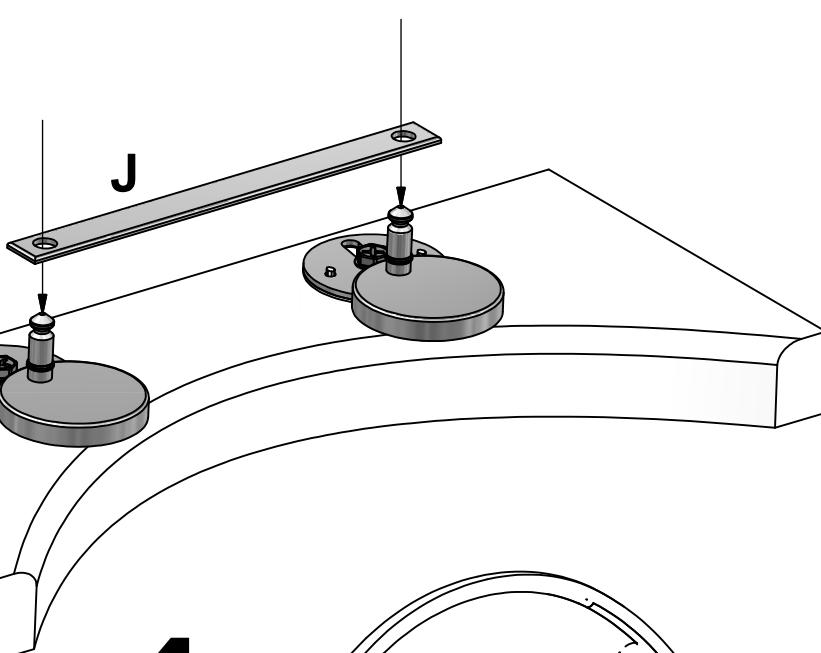

4

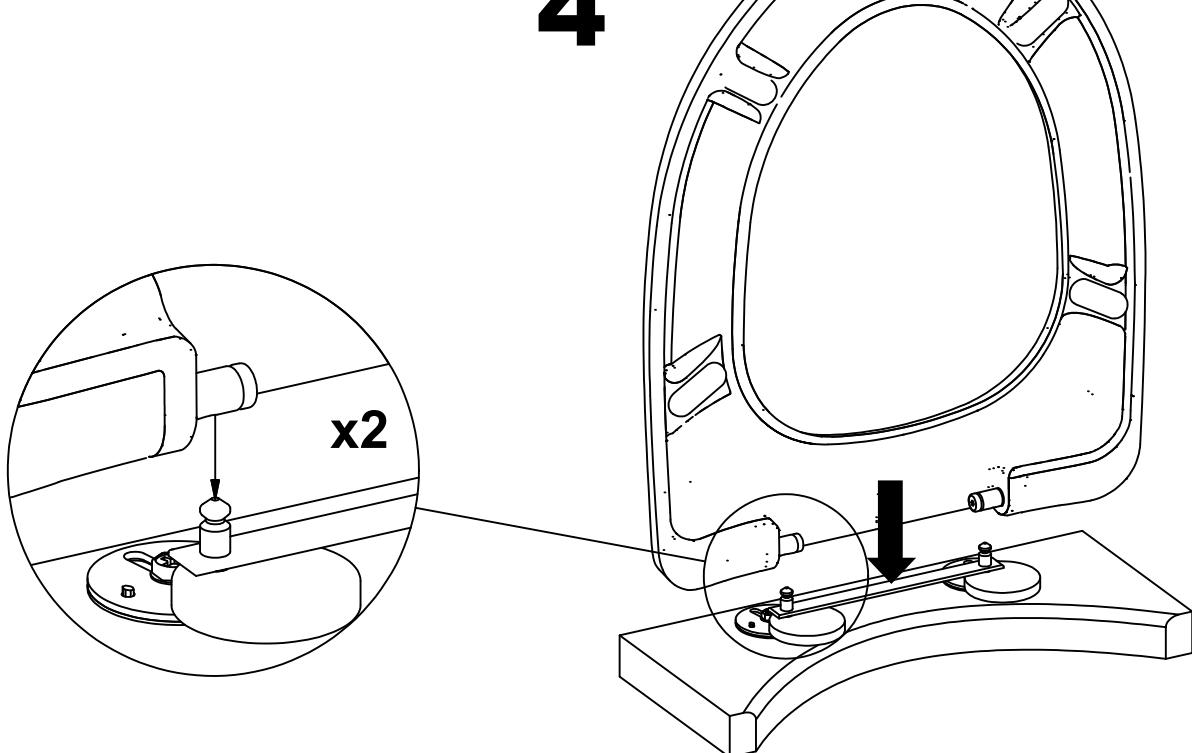

5

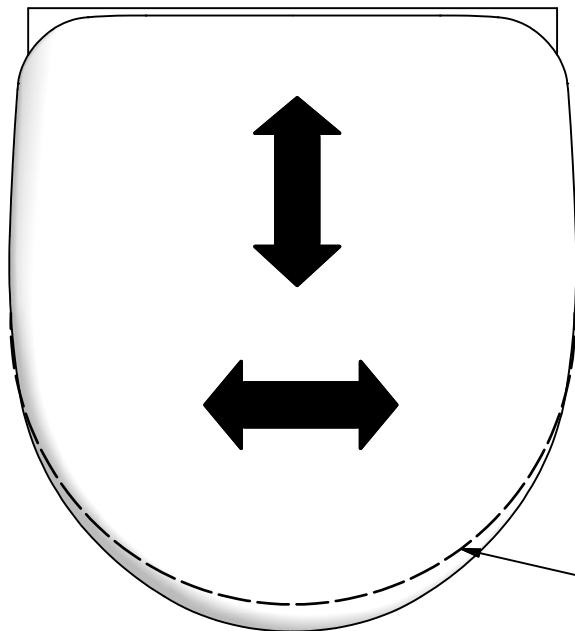


WC


6




- S** Dra nu åt skruvarna så hårt det går.
- N** Dra fast skruene så hardt du kan.
- DK** Skru skruerne så hårdt som muligt.
- FI** Kiristä nyt ruuvit loppuun saakka.
- GB** Tighten the screws as hard as possible.
- RU** Затем закрутите шурупы туго.

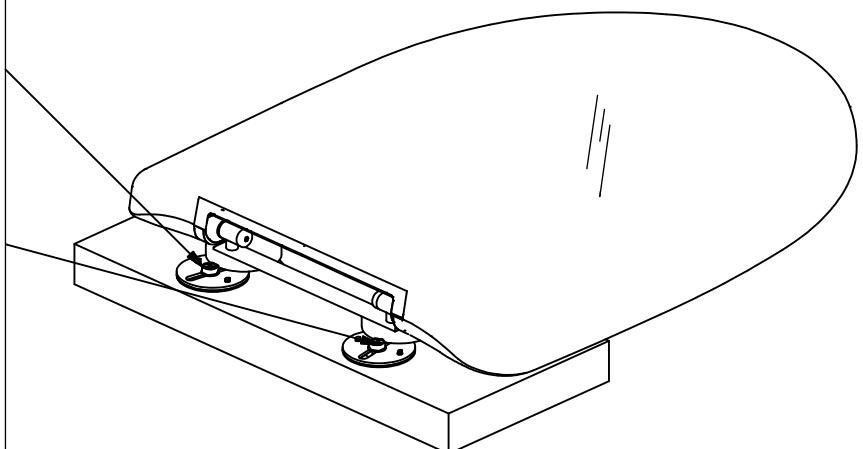

7 x2

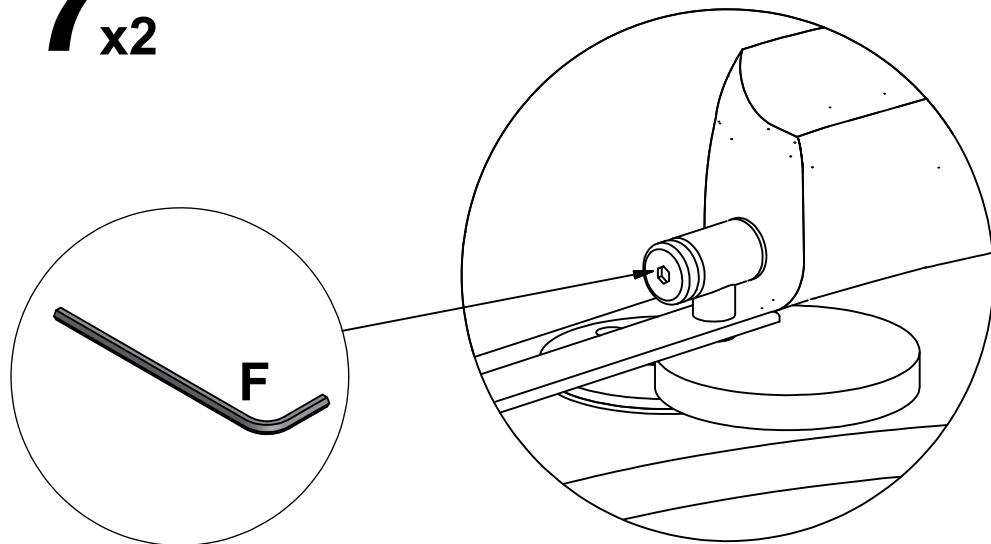

8 x2

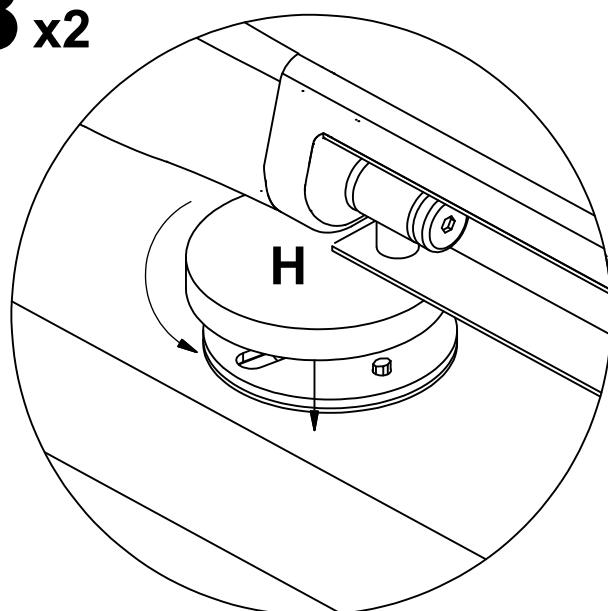

 **SVEDBERGS®**

2012-01-18